

# XPI Series Hybrid Charger & Inverter




## XPI 0.5kVA~7kVA

### Features

- MPPT controller, maximize utilization of solar panels
- Integrated design with controller, inverter and transformer
- Pure sine wave output
- Output isolated transformer, safe and stable
- Mains/diesel generator input interface (optional)
- Excellent overload capacity
- Suitable for all sorts of electrical appliances
- Intelligent battery management function
- Complete protections
- LCD display + LED status indicator

### Description

- XPI series single-phase off-grid inverter consist of 3 functional modules: solar controller, pure sine wave inverter and isolated transformer. The controller adapts MPPT technology and intelligent battery management design which is very efficient and smart; integrated pure sine wave inverter and low frequency isolated transformer makes it with excellent overload performance, suitable for a variety of electrical appliances. It supports mains/generator input, take advantages of old diesel generators, saving initial investment and operation maintenance cost.
- XPI series is mainly applied in remote animal husbandry, fishery area and big family to solve people's electricity problems.

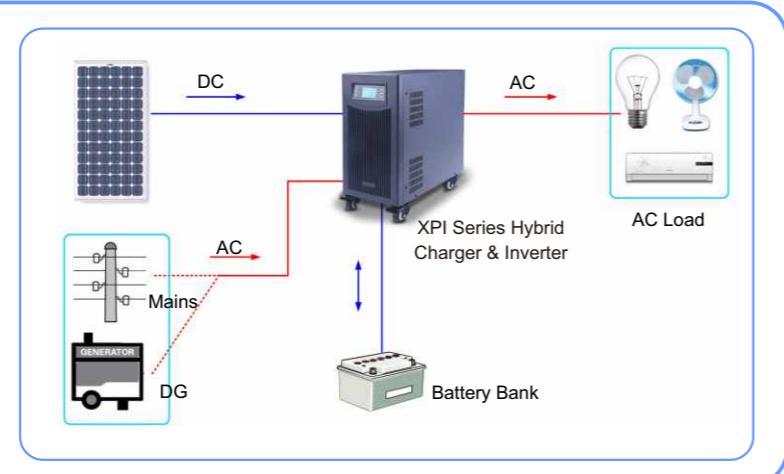

### Technical data

Model	XPI _-KVA-DMS/DML/ DPS/DPL/UMS/UML/UPS/UPL									
	0.5kVA	0.7kVA	1.0kVA	1.5kVA	2.0kVA	3.0kVA	4.0kVA	5.0kVA	6.0kVA	7.0kVA
Output power (kW)	0.4	0.6	0.8	1.2	1.5	2.5	3.0	4.0	5.0	6.0
Battery voltage (VDC)		24			48				96	
Battery configuration	200AH/12V*2pcs			200AH/12V*4				\		
<b>Solar Charger Parameters</b>										
Charger type	PWM/MPPT		MPPT		MPPT					
Rated Input power (W)	900/1440		2880		5760					
PV Input voltage (V)	30~50/30~90		70~150		150~300					
Recommended Input voltage (VDC)	36/60		90		180					
Max. input current (A)			50							
Max. output current (A)			50							
Battery float voltage (V)	27.2		54.5		109					
Battery equalizing charge voltage (V)	28.8		57.6		115.2					
<b>AC Charger Parameters</b>										
City power input voltage range (Vac)			110/220/230±25%							
City power input frequency (Hz)			50/60±3%							
AC charging current (A)			Rated: 10, Max.: 15							
<b>Inverter Parameters</b>										
Inverter output voltage			110±3%; 220±3% (or other output voltage)							
Inverter output frequency			50/60±3%							
Efficiency	>80%		>85%							
Overload capacity			105~120%, 30s; 120~150%, 10s; >150%, 5s							
Crest factor			3							
Output wave			Pure sine wave							
<b>General Parameters</b>										
Display			LCD+LED							
Display content			PV status, battery capacity, AC input voltage, AC output voltage, load, running status							
Complete protections			DC & AC overload, under-voltage, SPD, short-circuit, overcharge, overdischarge, over-temperature							
Cooling method			Forced air cooling							
Communication			RS232 (optional)							
Noise emission [dB (A)]			<60 (at 1 meter)							
Operating temperature range (°C)			-20~+50 (>50°C derating)							
Storage temperature range (°C)			-25~+70							
Relative humidity in operation			0~90% (non condensing)							
Max. operating altitude (m)			5000m (>1000m, derating)							
Dimension [bat. in (D*W*H mm)]			580*560*534		580*560*857				\	
Dimension [bat. out (D*W*H mm)]			420*145*215		500*195*345			500*240*490		
Weight [bat. in (kg)]	26.5	27.5	28.5	45	46	47			\	
Weight [bat. out (kg)]	8	9	10	11	19	22	35	40	45	54

Data may change without any notice.