

# SUNNY TRIPOWER

## 15000TL / 20000TL / 25000TL



STP 15000TL-30 / STP 20000TL-30 / STP 25000TL-30



**Intelligent service with  
SMA Smart Connected**



**SMA ShadeFix**  
STRING LEVEL OPTIMIZATION

### Efficient

- Maximum efficiency of 98.4%
- Yield increase without installation effort due to integrated shade management SMA ShadeFix

### Safe

- DC surge arrester (SPD type II) can be integrated

### Flexible

- DC input voltage of up to 1000 V
- Multistring capability for optimum system design
- Optional display

### Innovative

- Cutting-edge grid management functions with Integrated Plant Control
- Reactive power available 24/7 (Q on Demand 24/7)

## SUNNY TRIPOWER 15000TL / 20000TL / 25000TL

The versatile specialist for large-scale commercial plants and solar power plants

The Sunny Tripower is the ideal inverter for large-scale commercial and industrial plants. Not only does it deliver extraordinary high yields with an efficiency of 98.4%, but it also offers enormous design flexibility and compatibility with many PV modules thanks to its multistring capabilities and wide input voltage range.

The future is now: the Sunny Tripower comes with cutting-edge grid management functions such as Integrated Plant Control, which allows the inverter to regulate reactive power at the point of common coupling. Separate controllers are no longer needed, lowering system costs. Another new feature—reactive power provision on demand (Q on Demand 24/7).

# SMA SMART CONNECTED

## The integrated service for ease and comfort

SMA Smart Connected\* is the free monitoring of the inverter via the SMA Sunny Portal. If there is an inverter fault, SMA proactively informs the PV system operator and the installer. This saves valuable working time and costs.

With SMA Smart Connected, the installer benefits from rapid diagnoses by SMA. They can thus quickly rectify the fault and score points with the customer thanks to the attraction of additional services.



### ACTIVATION OF SMA SMART CONNECTED

During registration of the system in the Sunny Portal, the installer activates SMA Smart Connected and benefits from the automatic inverter monitoring by SMA.



### AUTOMATIC INVERTER MONITORING

SMA takes on the job of inverter monitoring with SMA Smart Connected. SMA automatically checks the individual inverters for anomalies around the clock during operation. Every customer thus benefits from SMA's long years of experience.



### PROACTIVE COMMUNICATION IN THE EVENT OF FAULTS

After a fault has been diagnosed and analyzed, SMA informs the installer and end customer immediately by e-mail. Everyone is thus optimally prepared for the troubleshooting. This minimizes the downtime and saves time and money. The regular power reports also provide valuable information about the overall system.



### REPLACEMENT SERVICE

If a replacement device is necessary, SMA automatically supplies a new inverter within one to three days of the fault diagnosis. The installer can contact the PV system operator of their own accord and replace the inverter.




### PERFORMANCE SERVICE

The PV system operator can claim compensation from SMA if the replacement inverter cannot be delivered within three days.

\* Details: see document "Description of Services – SMA SMART CONNECTED"

## Efficiency Curve

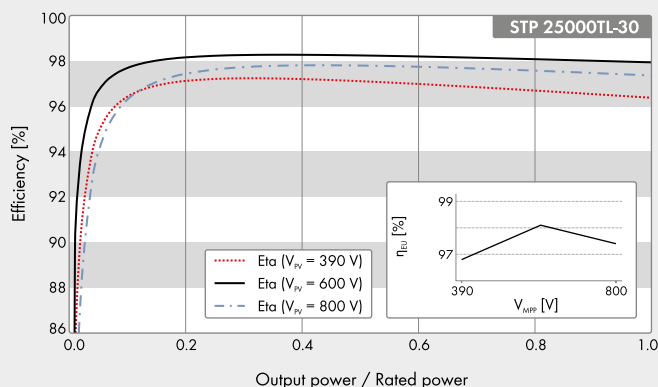

## Accessory



RS485 interface  
DM-485CB-10



Power Control Module  
PWCMOD-10



DC surge arrester Typ II,  
inputs A and B  
DCSPD KIT3-10



Multifunction relay  
MFR01-10

● Standard features ○ Optional features — Not available  
Data at nominal conditions  
Status: 02/2021

### Technical Data

#### Input (DC)

Max. generator power
DC rated power
Max. input voltage
MPP voltage range / rated input voltage
Min. input voltage / start input voltage
Max. input current input A / input B
Max. DC short-circuit current input A/input B
Number of independent MPP inputs / strings per MPP input

#### Output (AC)

Rated power (at 230 V, 50 Hz)
Max. AC apparent power
AC nominal voltage
AC voltage range
AC grid frequency / range
Rated power frequency / rated grid voltage
Max. output current / Rated output current
Power factor at rated power / Adjustable displacement power factor
THD
Feed-in phases / connection phases

#### Efficiency

Max. efficiency / European Efficiency
---------------------------------------

#### Protective devices

DC-side disconnection device
Ground fault monitoring / grid monitoring
DC surge arrester (Type II) can be integrated
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated
All-pole sensitive residual-current monitoring unit
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)

#### General data

Dimensions (W / H / D)
Weight
Operating temperature range
Noise emission (typical)
Self-consumption (at night)
Topology / cooling concept
Degree of protection (as per IEC 60529)
Climatic category (according to IEC 60721-3-4)
Maximum permissible value for relative humidity (non-condensing)

#### Features / function / Accessories

DC connection / AC connection
Display
Interface: RS485, Speedwire/Webconnect
Data interface: SMA Modbus / SunSpec Modbus
Multifunction relay / Power Control Module
Shade management SMA ShadeFix / Integrated Plant Control / Q on Demand 24/7
Off-Grid capable / SMA Fuel Save Controller compatible
Guarantee: 5 / 10 / 15 / 20 years
Certificates and permits (more available on request)

\* Does not apply to all national appendices of EN 50438

#### Type designation

Sunny Tripower 15000TL	Sunny Tripower 20000TL	Sunny Tripower 25000TL
27000 W <sub>p</sub>	36000 W <sub>p</sub>	45000 W <sub>p</sub>
15330 W	20440 W	25550 W
1000 V	1000 V	1000 V
240 V to 800 V / 600 V	320 V to 800 V / 600 V	390 V to 800 V / 600 V
150 V / 188 V	150 V / 188 V	150 V / 188 V
33 A / 33 A	33 A / 33 A	33 A / 33 A
43 A / 43 A	43 A / 43 A	43 A / 43 A
2 / A:3; B:3	2 / A:3; B:3	2 / A:3; B:3
15000 W	20000 W	25000 W
15000 VA	20000 VA	25000 VA
	3 / N / PE; 220 V / 380 V	
	3 / N / PE; 230 V / 400 V	
	3 / N / PE; 240 V / 415 V	
	180 V to 280 V	
	50 Hz / 44 Hz to 55 Hz	
	60 Hz / 54 Hz to 65 Hz	
	50 Hz / 230 V	
29 A / 21.7 A	29 A / 29 A	36.2 A / 36.2 A
	1 / 0 overexcited to 0 underexcited	
	≤ 3%	
	3 / 3	
98.4% / 98.0%	98.4% / 98.0%	98.3% / 98.1%
	●	
	● / ●	
	○	
	● / ● / —	
	●	
	I / AC: III; DC: II	
	661 / 682 / 264 mm (26.0 / 26.9 / 10.4 inch)	
	61 kg (134.48 lb)	
	−25 °C to +60 °C (−13 °F to +140 °F)	
	51 dB(A)	
	1 W	
	Transformerless / Opticool	
	IP65	
	4K4H	
	100%	
	SUNCLIX / spring-cage terminal	
	○	
	○ / ●	
	● / ●	
	○ / ○	
	● / ● / ●	
	● / ●	
	● / ○ / ○ / ○	
	AS 4777, BDEW 2008, C10/11, CE, CEI 0-16, CEI 0-21, CNS 15382, CNS 15426, DEWA 2.0, DK1, DK2, EN 50549-1, EN 50549-2, G99/1, EN 50438:2013*, IEC 60068-2-x, IEC 61727, IEC 62109-1/2, IEC 62116, IS 16221-1/2, IS 16169, MEA 2013, NBR 16149, NEN EN 50438, NRS 097-2:1, PEA 2013, NTS, PPC, RD 1699/413, RD 661/2007, Res. n°7:2013, RfG compliant, SI4777, TOR generator, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105, VDE-AR-N 4110, VFR 2014	
STP 15000TL-30	STP 20000TL-30	STP 25000TL-30

# www.SunnyPortal.com

Professional PV system monitoring, management and data display

