

360-390W

72Cell MonoCrystalline Module

Maximum Efficiency 20.1%

Positive Power Tolerance 0~+5W



Optimum Value

1500V system voltage results in lower BOS cost
Low thermal coefficient for more energy production
Good for large scale installations



Higher Reliability

In-house testing beyond standard requirements
100% EL double inspection



Robust and Corrosion Free

2400Pa wind load - 5400Pa snow load
25mm Hail stone at 82 km/h



Product & System Certificates

ISO9001 : Quality Management System


ISO14001 : Environment Management System



Warranty
Performance



Warranty
Product

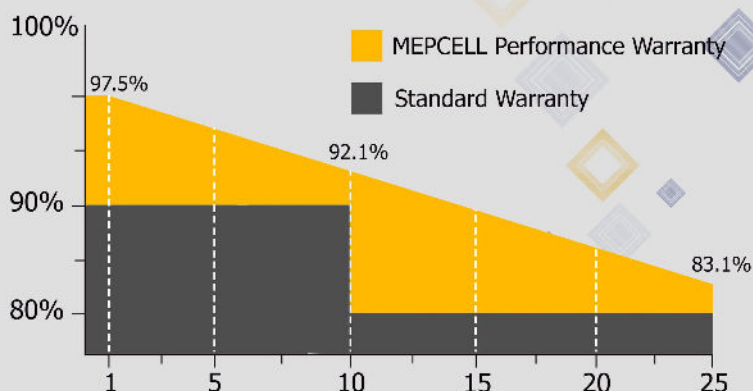

Electrical Specification (STC)

STC: AM1.5 1000W/m² 25°C [Test Uncertainty: ±3%]

Model			MPM-72FC 360	MPM-72FC 365	MPM-72FC 370	MPM-72FC 375	MPM-72FC 380	MPM-72FC 385	MPM-72FC 390
Max Power	P _{mp}	[W]	360	365	370	375	380	385	390
Max Power Voltage	V _{mp}	[V]	38	38.5	39	39.5	40	40.5	41
Max Power Current	I _{mp}	[A]	9.08	9.2	9.32	9.44	9.56	9.68	9.80
Open Circuit Voltage	V _{oc}	[V]	46.78	47.2	47.63	48.1	48.47	48.9	49.33
Short Circuit Current	I _{sc}	[A]	9.63	9.7	9.77	9.85	9.92	10	10.07
Efficiency		[%]	18.55	18.80	19.07	19.33	19.58	19.89	20.10

*Positive Power Tolerance 0~+5W

Electrical Specification (NMOT)

NMOT: 800W/m² 20°C 1ms [Test Uncertainty: ±3%]

Max Power	P _{mp}	[W]	280	284	288	292	296	301	304
Max Power Voltage	V _{mp}	[V]	34.8	35.3	35.8	36.3	36.8	37.3	37.6
Max Power Current	I _{mp}	[A]	7.66	7.78	7.9	8.02	8.15	8.27	8.39
Open Circuit Voltage	V _{oc}	[V]	43.11	43.51	43.91	44.36	44.76	45.11	45.51
Short Circuit Current	I _{sc}	[A]	8.22	8.29	8.36	8.44	8.51	8.59	8.66

Mechanical Data

Solar Cell	Mono-Crystalline PERC - 156.75mm (6") - [6x12]
Module Dimension	1956x992x35 mm (77.0x39.05x1.37 inches)
Weight	23kg [50.7lb]
Front Cover	Glass - 3.2mm High Transmission. Tempered AR Coated
Back Cover	White - 300μ
Frame	Silver Anodized Aluminium Alloy
Junction Box	IP68 Rated - 3 Bypass Diodes
Cable	PV Tech Cable 4.0m ² (0.006 inches ²)-1000mm(39.37")
Connector	MC4 Compatible (1500V)

Temperature Ratings





Temperature Coefficient	I _{sc}	α	[%/°C]	+0.05
Temperature Coefficient	V _{oc}	β	[%/°C]	-0.30
Temperature Coefficient	P _{max}	γ	[%/°C]	-0.39
Nominal Module Operating Temperature	NMOT		[°C]	45 ± 2

Properties for System Design

Max System Voltage	1500V
Max System Fuse Rating	20 A
Safety Class	II
Fire Rating	C/Type 2
Operational Temperature	-40 to +85 °C

Packaging Information

# Module per Pallet	27
# Pallet per 45'HC Container	24
# Pallet per 40'HC Container	22
Pallet Dimension (mm)	1995x1120x1145
Pallet Weight (kg)	646

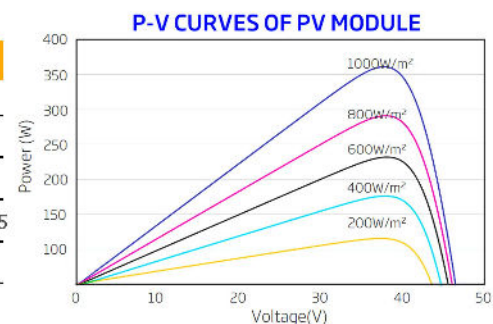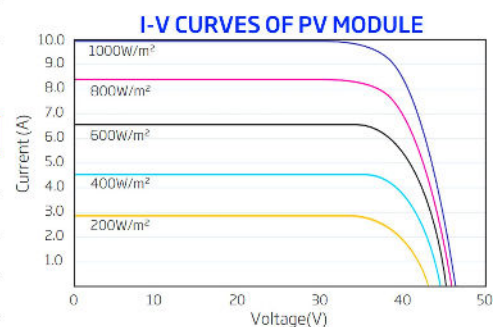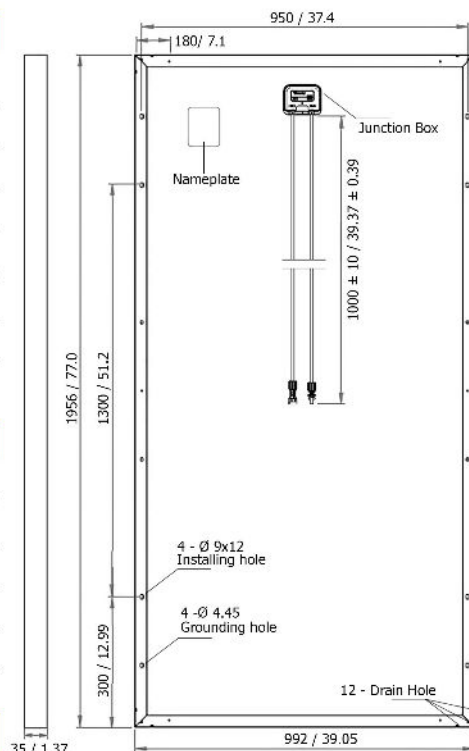

Caution:

To operate, install and manage MEPCELL's modules, read the installation manual and use carefully.

Observations:

This Datasheet is subject to change without notice due to continuous improvement of our products. You can find all records of the updates on our website www.mepcell.com or by contacting one of our sales staff. All rights reserved ©Mana Energy Pak